




2026 City Projects



Main St Phase 2

- Project Description
 - Resurfacing from I70 to Pitman Ave
 - Improved pedestrian facilities
 - Spring 2026 Construction
 - Undergrounding Ameren Electric Lines

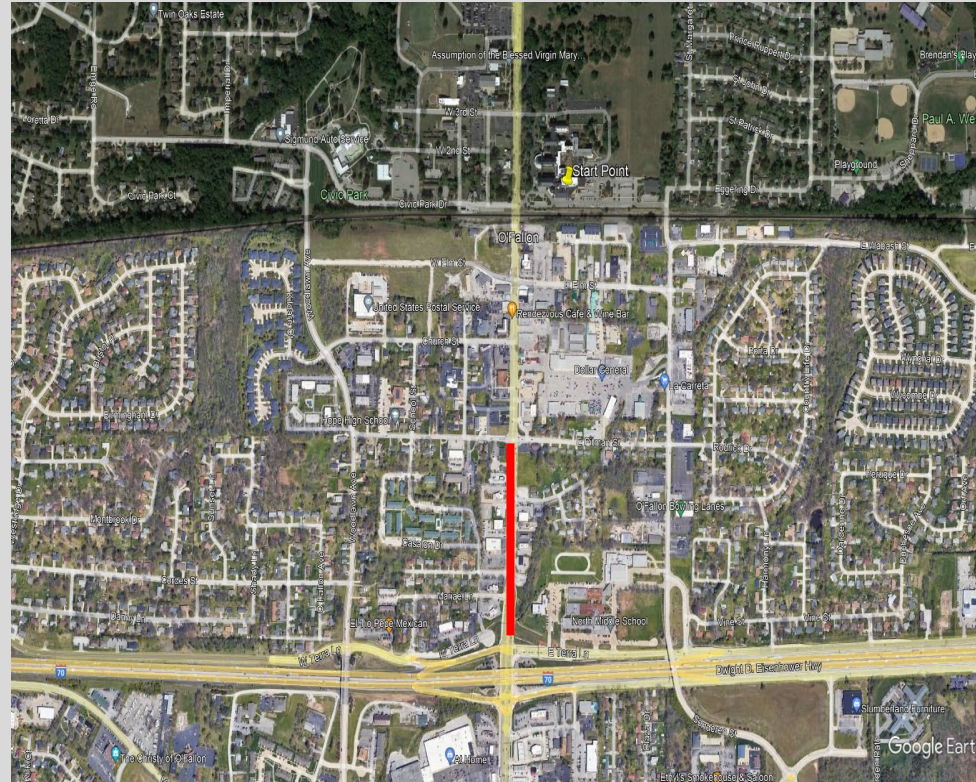

Main St Phase 3

- Project Description
 - Limits are from RR Tracks to St. Joseph Ave
 - Roundabout
 - Improved pedestrian facilities
 - Bid/Construction 2026

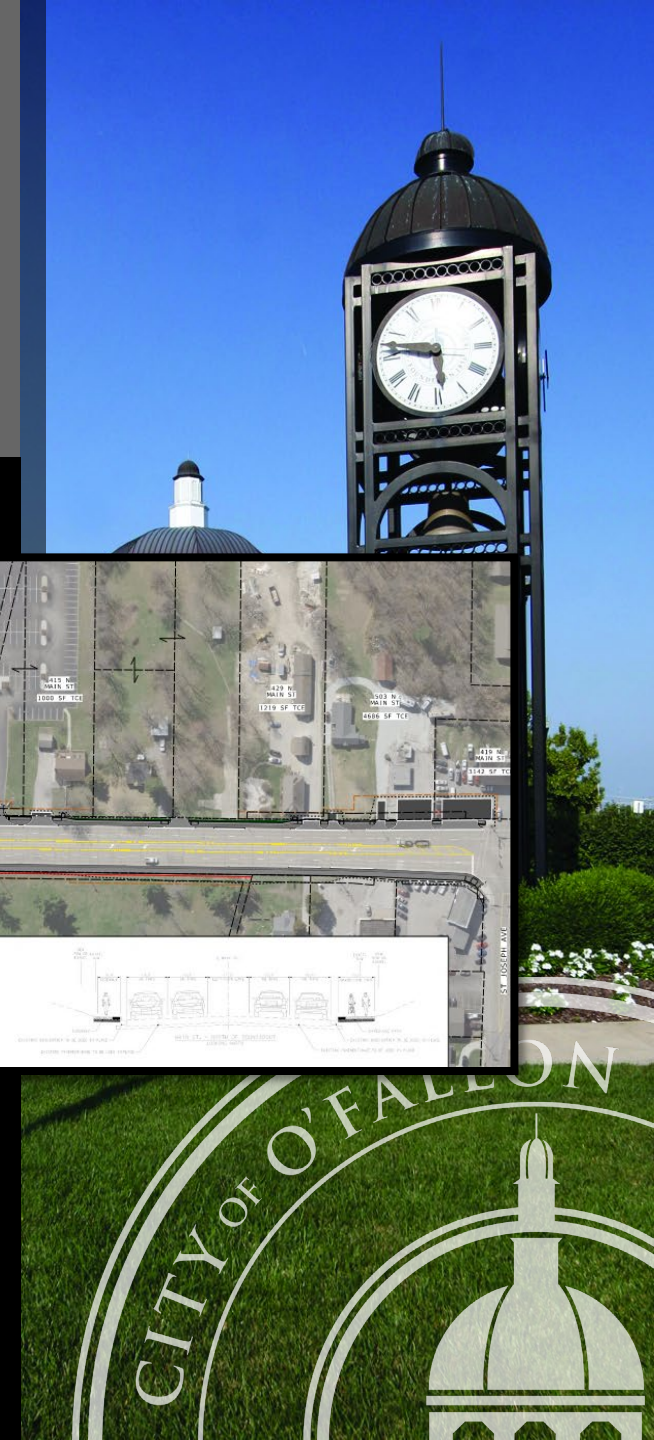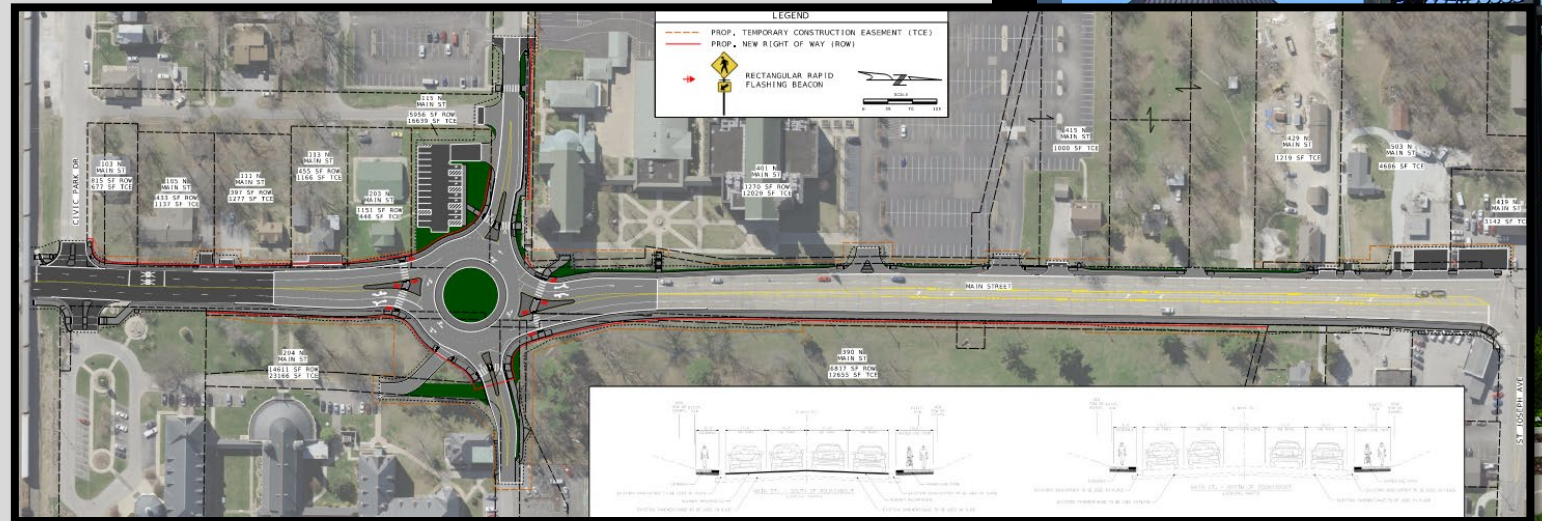

Hwy K/Hwy N Intersection Improvements


- Project Description
 - Construct two way turn lanes for eastbound and westbound Hwy N traffic
 - Improve pedestrian connectivity
 - Design-2023
 - Construction-2025 into 2026



Eggering Dr. Reconstruction

- Project Description

- Reconstruct Eggering Drive from City Hall Entrance to St. Matthew / Sheppard Drive
- Complete reconstruction of the pavement with asphalt and curb/gutter
- Complete sidewalk connectivity and replace existing sidewalk to bring sidewalk into ADA compliance
- Design 2024
- ROW 2025
- Bid/Construction 2026

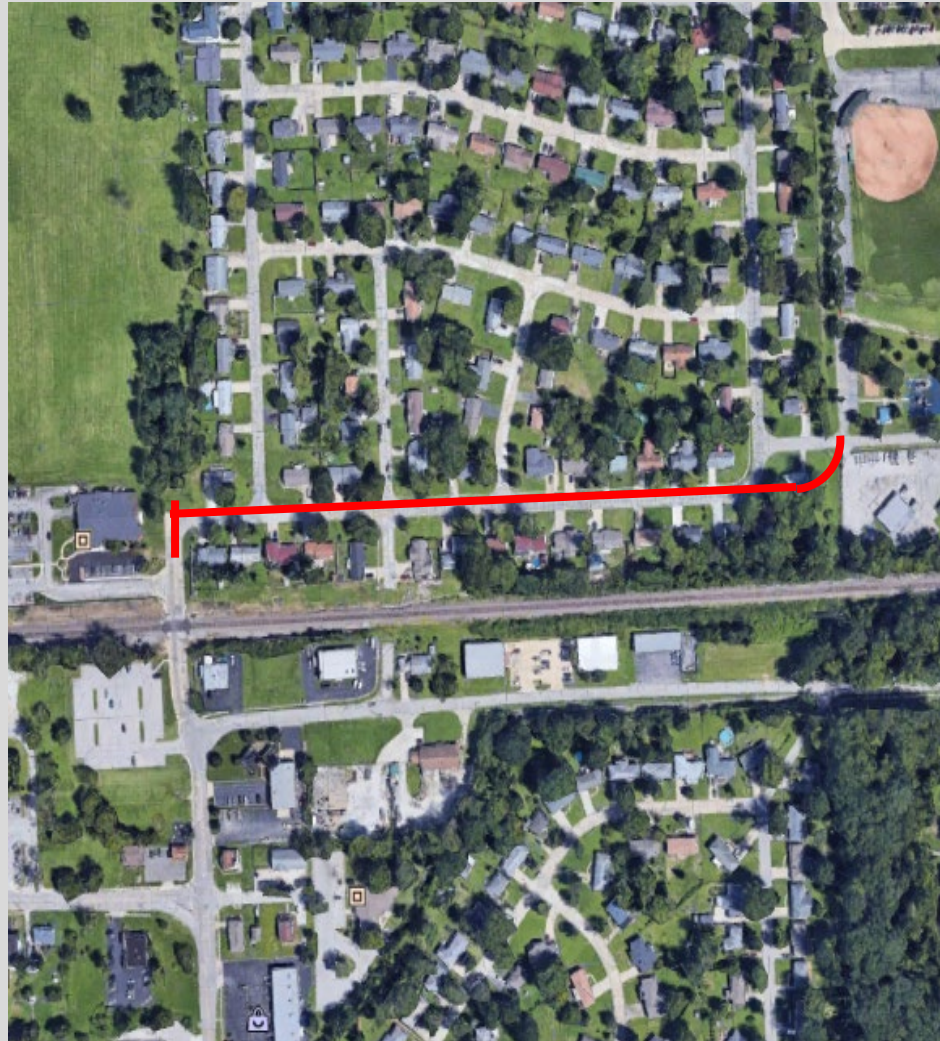

Diehr Road Reconstruction


- Project Description

- Reconstruct the roadway- Hopewell Rd to Hwy DD
- Add shoulders, safety improvements
- Add pedestrian facilities
- Phase 1- Hwy DD to Long Gate Dr.
- Design 2024
- ROW 2025
- Bid/Construction 2026




Tom Ginnever & N. Cool Springs Intersections

- Project Description
 - Intersection improvements- Roundabout vs. Signalized
 - Help mitigate congestion and delays, and improve safety
 - Design 2025
 - ROW 2025
 - Bid/Construction 2026

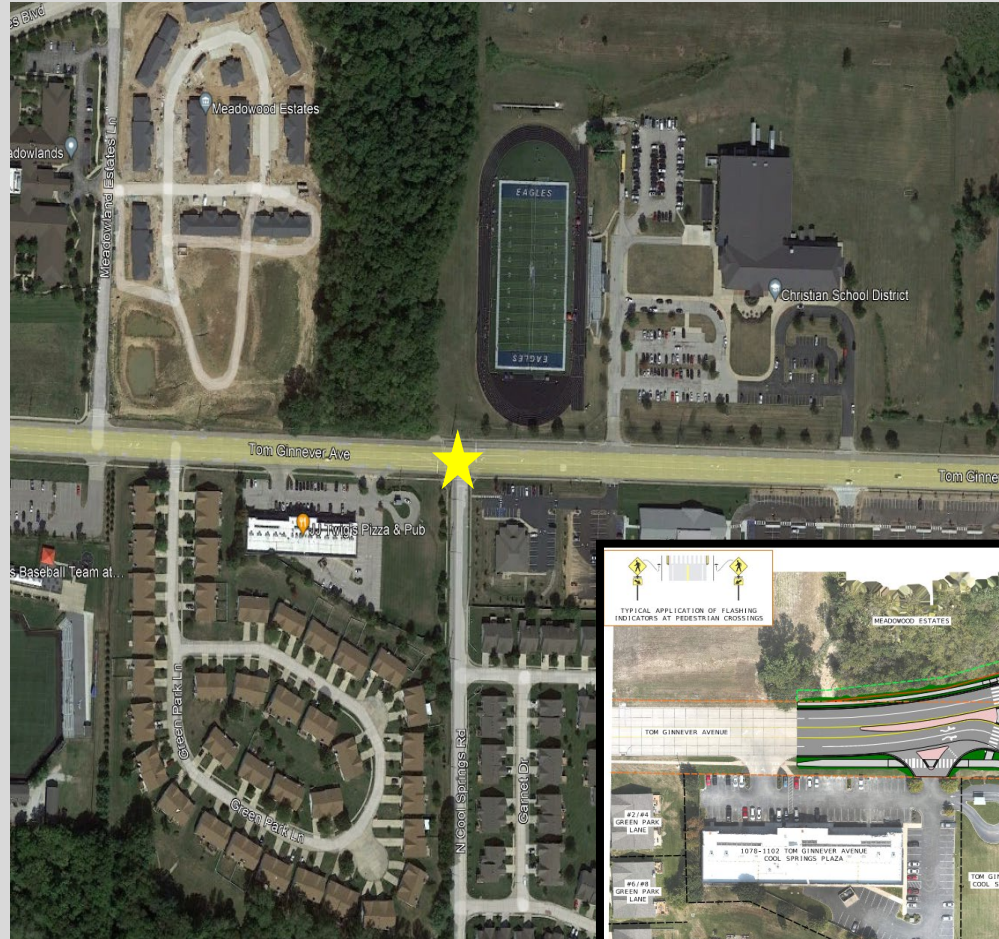

West Terra Lane Realignment

- Project Description
 - Improve intersection configuration and alignment
 - Improve pedestrian facilities with project limits
- Design 2024
- ROW 2026
- Construction 2028

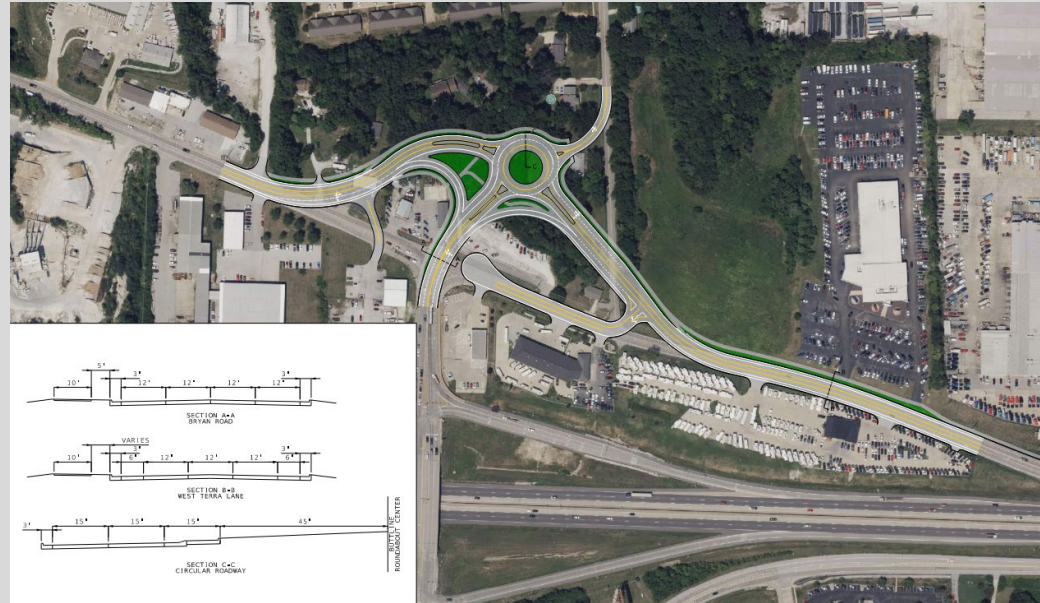



Weldon Spring Road Intersection Improvements

- Project Description
 - Roundabout construction
 - Improve pedestrian facilities with project limits
 - Widened Pavement Sections
 - Constructed 2025




2026 Design Projects

- Project Description
 - Mexico Road from Belleau Creek to Barrington Drive
 - Shared Use Path Installation
 - ADA improvements
 - Retaining walls
 - Resurfacing
 - Design 2026, ROW 2027-2028, Construction 2029
 - Bryan Road from White Magnolia Drive to Norwood Hills Drive
 - Shared Use Path Installation
 - Slab Replacements
 - Design 2026, ROW 2027-2028, Construction 2029

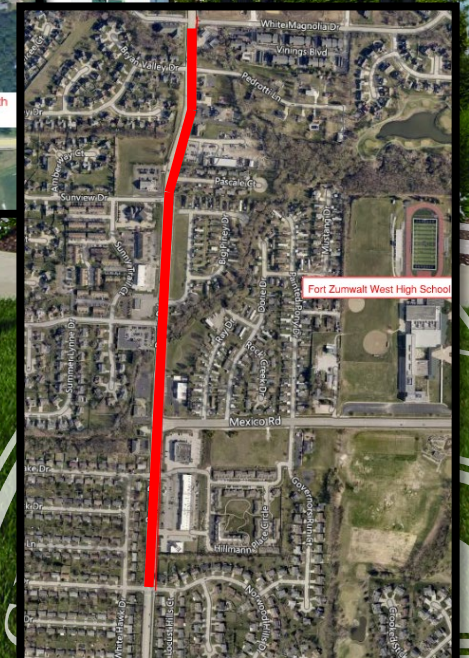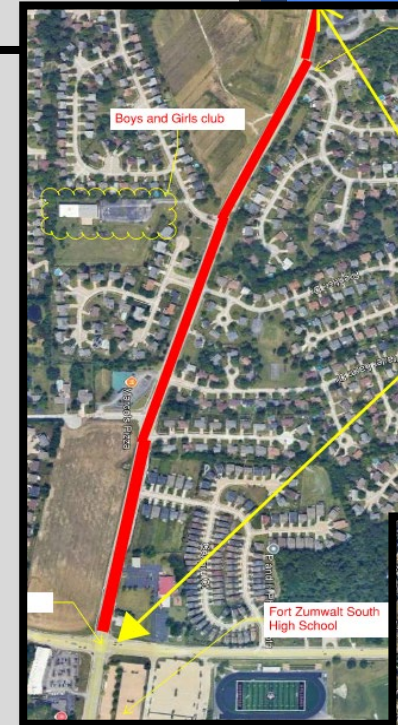

2026 Bridge Repairs

- Guthrie Bridge Maintenance Project
 - Bid in 2026
 - Construction 2026
 - Approach Slab Repairs
 - Vertical Partial Depth Repairs

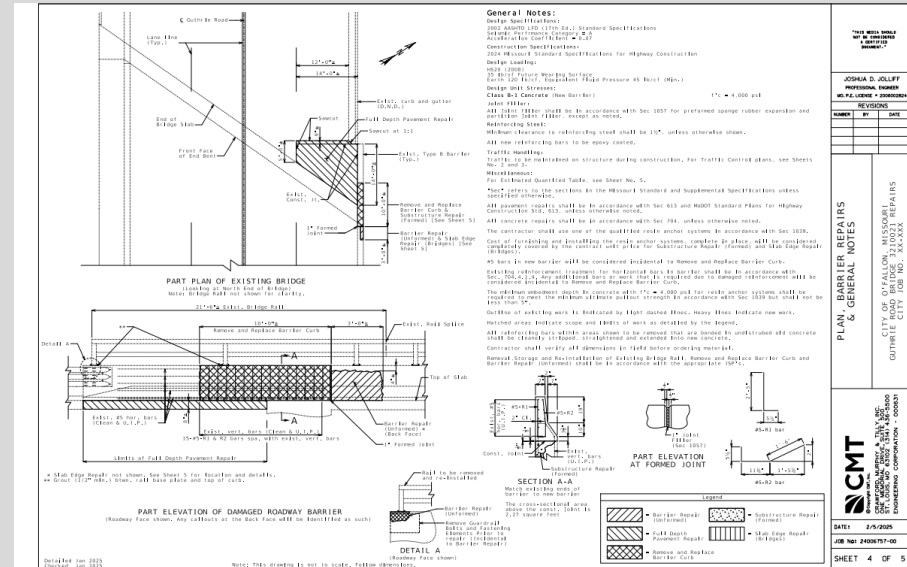


Annual Pavement Programs

- Concrete Slab Replacements
 - \$5,000,000 annually spent on slab replacements (2026)
 - Includes curb ramp replacements at selected locations
- Asphalt Resurfacing
 - Typical method is 1.75"-2" mill and fill operations
- Asphalt Preservation Techniques
 - Micro Surfacing
 - Seal coats
- Crack sealing
 - Hot applied tar sealants
- Partial Depth Repair-Targeted Joint Repair
 - Hot applied mastic sealants



O'Fallon Center for Advanced Skills Training in Law Enforcement

- Project Description
 - Construction of a training center to enhance skills training for local police departments
 - 3yd-200yd firing range
 - EVOC track
 - Simulated Shoot House
 - Obstacle Courses
 - K9 training
 - Classroom style training
 - Bid 2025
 - Construction starting in 2025

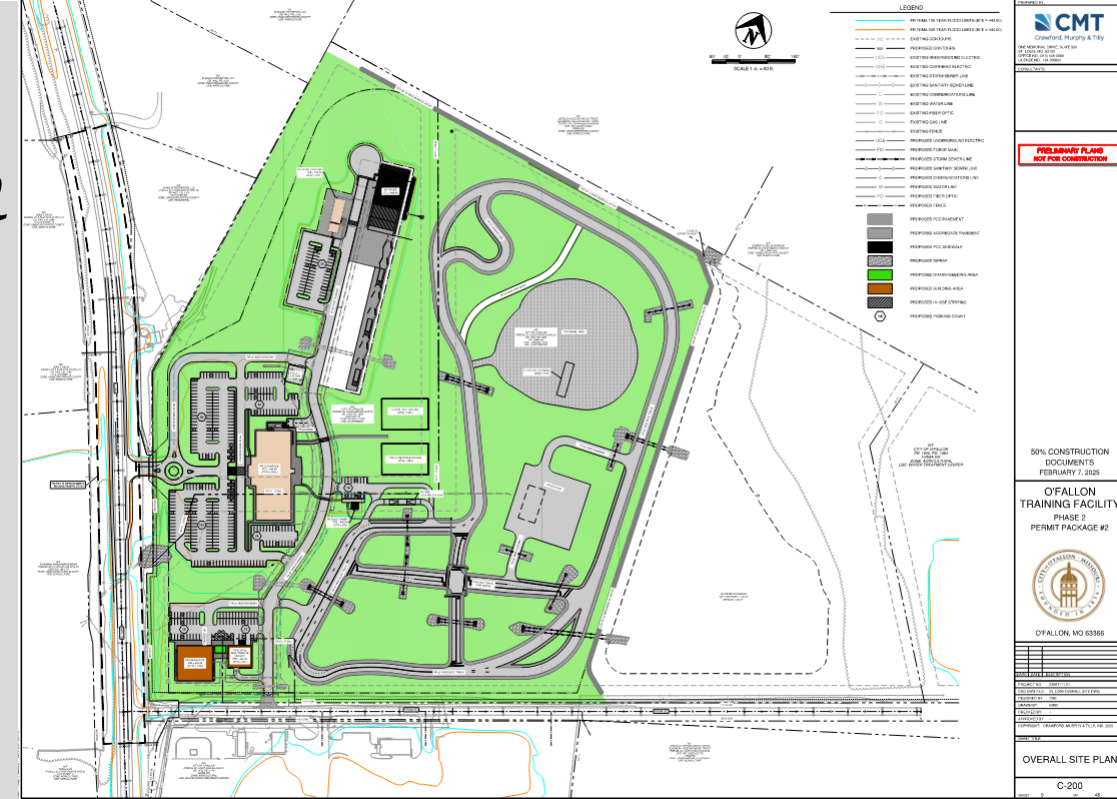

Water Treatment Plant Improvements

- Project Description
 - Pre-Oxidation Improvements
 - Aeration Basin – Installation of New Aeration Equipment
 - Permanganate Feed System – Installation of New Storage/Feed System
 - Plate Settlers – Evaluate Improvement Mechanisms for Rehabilitation

Design: 2026

Construction: 2027-2028




Waste Water Treatment Plant Improvements

- Project Description
 - Sludge Dewatering Improvements
 - Evaluate Centrifuge and Belt Filter Press Dewatering Technologies for Implementation at Biosolids
 - Clarifier Rehabilitation
 - 2-year Rehabilitation Cycle

Design: 2025-2026

Construction: 2026-2028

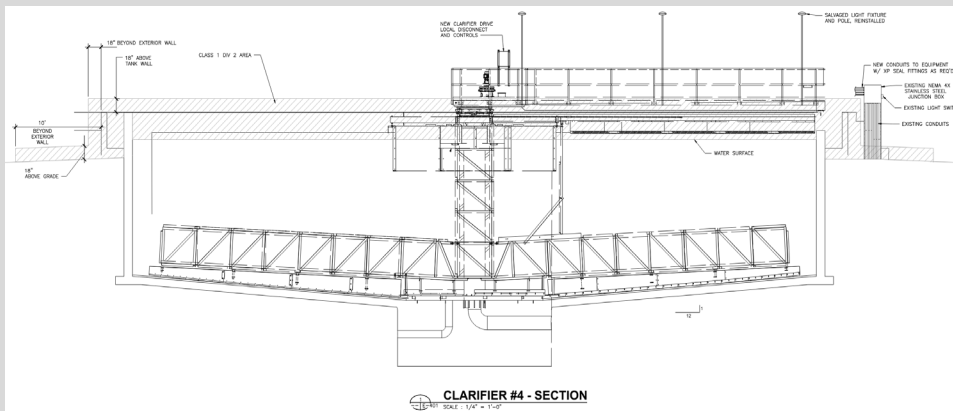


Distribution System Improvements

- Project Description
 - Brookside Forest Water Main Extension
 - Extend 8" PVC Water Main 2,000 ft. from Dusty Brook Drive to Progress West Lane.

Design: 2025-2026

Construction: 2026-2027

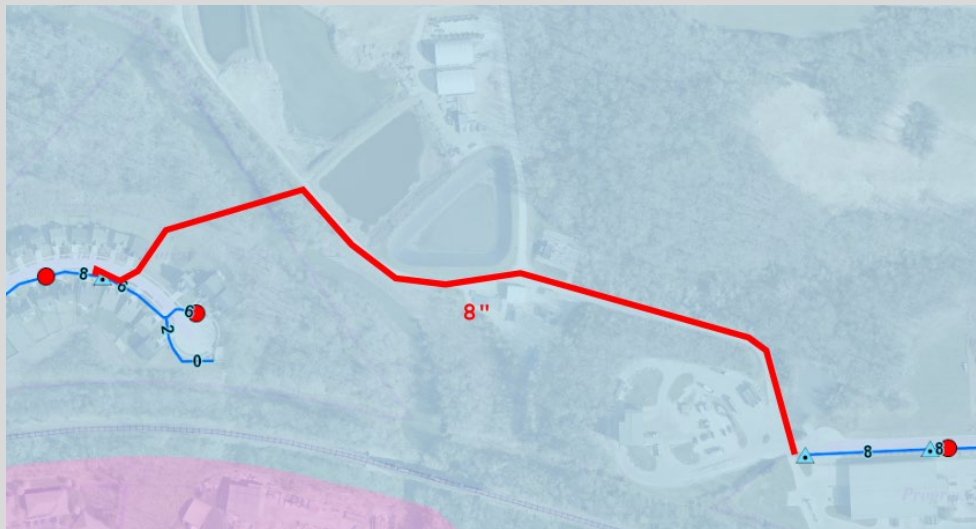

Collection System Improvements

- Project Description
 - Barrington Relief Sewer
 - Accommodate High Flow Events
 - Lift Station Upgrades
 - East Lift Station Gate Replacement
 - Peruque Creek Lift Station Actuator Replacement

Design: 2025-2026

Construction: 2026-2028

